



DC Wall Control (RF)

Model 2415

Color Matte White

Location Outdoor Coastal & Tropical Damp¹

Fan diameter 132 cm / 52 inches

Materials Waterproof canopy. Stainless steel hardware kit. Rust-resistant coating and weatherproof blades.

Blades (3) ABS plastic

Coverage area Space +37m²

Input Voltage 100-120v and 220v-240 VAC,
1 phase, 50-60Hz

Motor DC. Reversible. 6 speeds

Control Wall control (RF)

Reverse flow Winter & Summer mode

Light kit No light included

Hanging system Universal 12.5cm (5") and 25cm (10")

Airflow (Max) 6,800 CFM. 192.55 m³/min

Speed (Max) 207 RPM

Sound Level² <40 dba at max speed

Power (W) 38W

Warranty: 10-Years motor.

¹Outdoor Damp: Areas that are not directly exposed to sun, rain, snow, water, or moisture

²Sound level: Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions



ESPECIFICACIONES DEL PRODUCTO



DC Wall Control (RF)

Modelo 2415

Color Mate blanco

Ubicación Uso de costa / tropical. (patio cubierto) ¹

Diámetro 132 cm / 52 pulgadas

Materiales Tornillos acero inoxidable. Pintura anticorrosión. Tapa impermeable.

Aspas (3) ABS plástico

Área impacto Área / espacio +37m²

Voltaje 100-120v y 220v-240 VAC,
1 phase, 50-60Hz

Motor DC. Reversible. 6 velocidades

Control Control de pared (RF)

Dirección Modo verano e invierno

Luz Luz no incluida

Sistema para colgar Universal 12.5cm (5") and 25cm (10")

Flujo Aire (Max) 6,800 CFM. 192.55 m³/min

Velocidad (Max) 207 RPM

Nivel sonoro²: <40 dba max velocidad

Potencia (W) 38W

Garantía: 10 años motor.

¹ Exterior: Zonas que no están expuestas directamente al sol, la lluvia, la nieve, el agua o la humedad.


² Nivel sonoro: Los resultados reales de las mediciones de sonido sobre el terreno pueden variar debido a las superficies reflectantes del sonido y a las condiciones ambientales.



EVOLVE

ceiling fans


Dimensions / Dimensiones

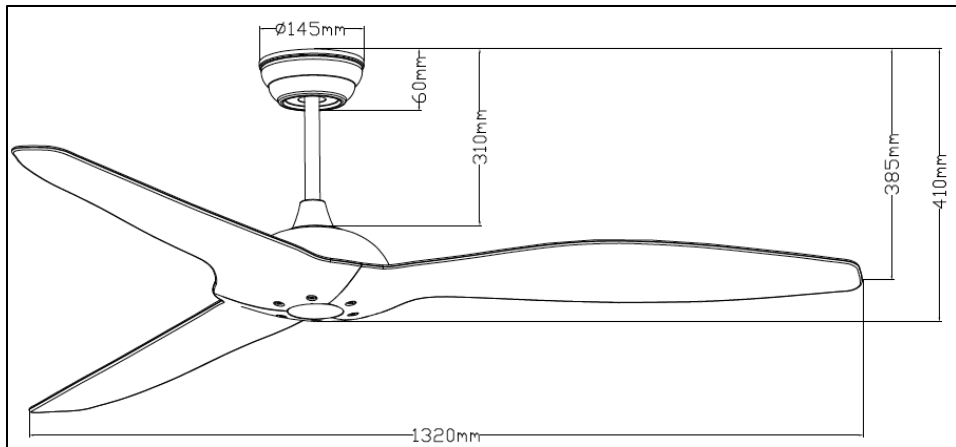

EVOLVE

ceiling fans

TECHNICAL DATA

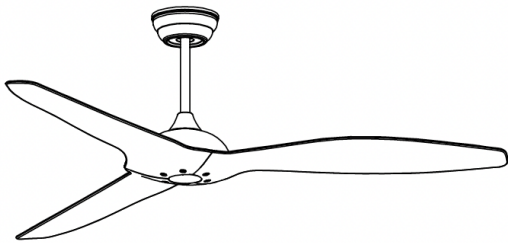

Diameter / Diametro	132cm / 52 inches
Motor	Reversible. DC motor. 6-speed / velocidades.
Location / ubicación	Indoor-Outdoor covered patio. Interior-Exterior patio cubierto. IPX2
Material Blades / Aspas	ABS. Plastic / Plástico
Control	Remote control / Mando a distancia Wall control / control de pared
Universal downrod Barra extensible	40 60 90 120 cm 15 23 35 47 inches
Warranty / Garantía (years/años)	10-Motor. 2-LED Light/Luz.
Input Voltage /	100-240 VAC, 50-60Hz

Speed	Power (W)	Amps	RPM	Airflow (CFM)	Airflow (m ³ /min)	Operating Voltage	Sound Level*
#1	7.9	0.069	126	1,360	38.08	100-240 VAC 1 phase 50-60Hz	<40 dba at max speed
#2	11	0.092	144	2,040	57.12		
#3	15.8	0.126	169	3,400	95.20		
#4	21.5	0.165	187	5,100	142.80		
#5	29.9	0.221	210	5,780	161.84		
#6	38.7	0.279	226	6,800	190.40		

*Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions

*Evolve ceiling fan tested 132cm / 52". Fan tested input voltage at 100 – 240v ~ 50/60Hz. Average results provided.
Tested with: Universal 25cm downrod mount. DC Motor size 153*12. Receiver / remote control.
Product Gross Weight: 7.4 kgs (16.3lbs). Product Net Weight: 6.4 kgs (14.1lbs).*

